

## 8038-1 Axial Series

Dimensions: 80X80X38 mm

Bearing Type: Ball Bearing

Function Type: FG/RD Signal,PWM pulse


Protection: Auto Restart Protection or General Options




## SPECIFICATIONS

MODEL NO	VOLTAGE	CURRENT	POWER	SPEED	AIR FLOW		STATIC PRESSURE		NOISE	CURVE
	V	A	W	RPM	CMM	CFM	mmH <sub>2</sub> O	INHzO	(dBA)	
8038BVL-N (P/M) 1	12	0.70	8.40	5000	1.692	59.78	17.18	0.677	50.80	L
8038BVM-N (P/M) 1	12	1.70	20.40	6500	2.257	79.76	29.51	1.163	56.46	M
8038BVH-N (P/M) 1	12	2.80	33.60	7500	2.564	90.60	37.26	1.468	60.90	H
8038BVL-N (P/M) 2	24	0.50	12.00	5000	1.692	59.78	17.18	0.677	50.80	L
8038BVM-N (P/M) 2	24	1.00	24.00	6500	2.257	79.76	29.51	1.163	56.46	M
8038BVH-N (P/M) 2	24	1.80	43.20	7500	2.564	90.60	37.26	1.468	60.90	H
8038BVL-N (P/M) 4	48	0.25	12.00	5000	1.692	59.78	17.18	0.677	50.80	L
8038BVM-N (P/M) 4	48	0.55	26.40	6500	2.257	79.76	29.51	1.163	56.46	M
8038BVH-N (P/M) 4	48	0.85	40.80	7500	2.564	90.60	37.26	1.468	60.90	H

## PERFORMANCE CURVES

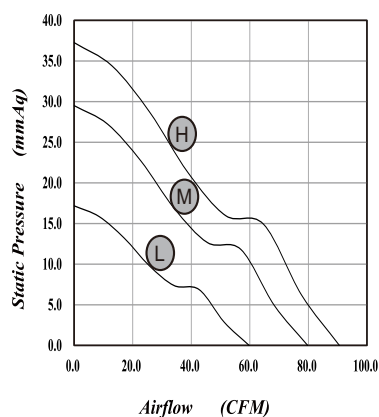

## DIMENSIONS DRAWING

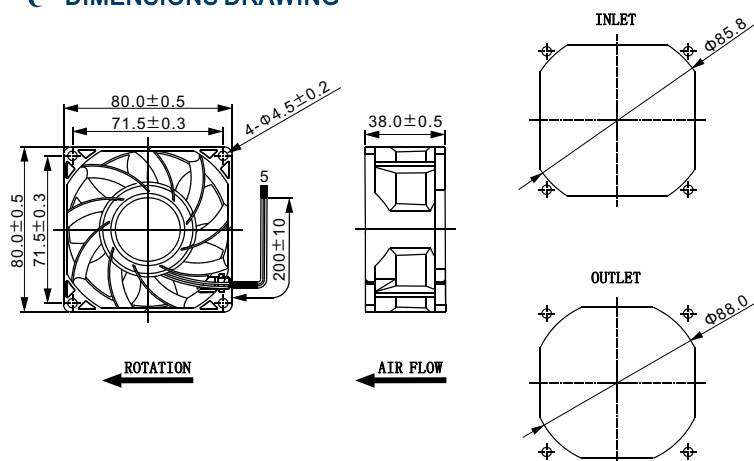

\*Specifications are subject to change without notice